

ALL NEW!
Now with
Ethernet

8TraXX™

16 Channel Audio Repeater



Applications


- Retail
- Theme Parks
- Museums
- Cruise Ships
- Restaurants
- Theater

8TraXX lets you play eight independent stereo tracks from a single, economical rack-mount unit. It's perfect for dark rides, museums, and interactive displays.

- ✓ Ethernet for remote updating
- ✓ 16 Channels of Audio from One CompactFlash
- ✓ Display LCD

Each track is individually triggered by its own discrete input – contact closure or voltage – allowing direct connection to proximity sensors or switches. All tracks can be controlled via RS-232, MIDI, or Ethernet.

8TraXX stores clips in MP3 format on CompactFlash for a rugged, reliable, maintenance-free solution to your playback needs. Access time is nearly instantaneous! All eight tracks are completely independent, and offer superb audio quality. With remote updating via Ethernet, the 8TraXX offers a flexible and reliable solution for all of your multi-channel playback needs.

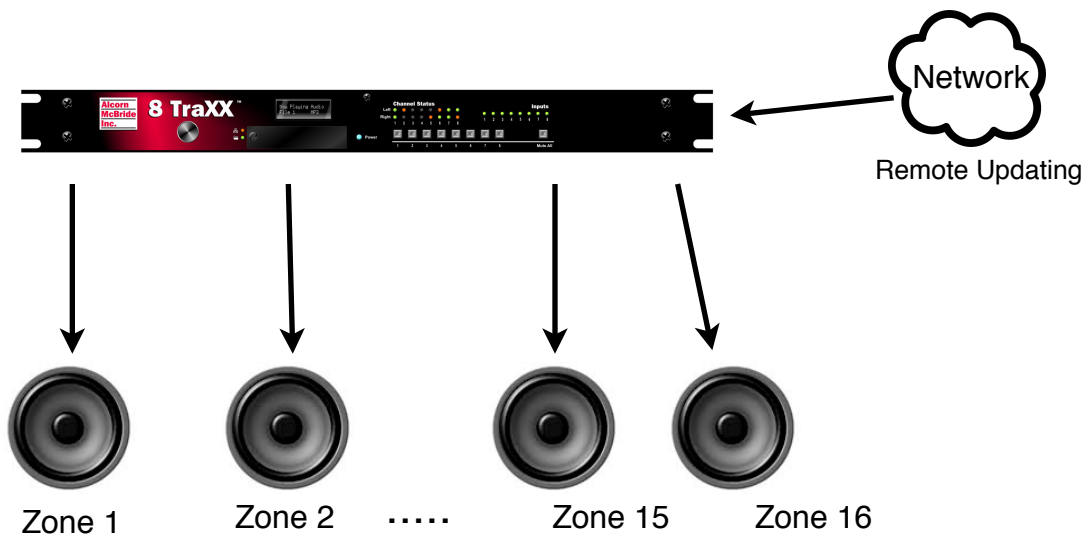

**Alcorn
McBride
Inc.**

3300 S. Hiawassee Rd.
Building 105
Orlando, FL 32835
Tel (407) 296-5800
Fax (407) 296-5801
info@alcorn.com
www.alcorn.com

8TraXX™

16 Channel Audio Repeater



Specifications

Audio

Channels: 8 Stereo Unbalanced RCA
Format: MP3
Sample Rate: Up to 48KHz
Playback Time: Over 100 Hours (varies by CompactFlash size)
Media: CompactFlash

Control

Serial: DB-9M RS-232, 9600 baud, N, 8, 1
Ethernet: 10/100 Base-T, UDP Control, FTP File Transfer, NTP
Parallel Inputs: (8) Programmable, Contact Closure or Voltage (Start/Stop, Still, Mute, Loop)
MIDI: 5 Pin DIN

Front Panel

Pushbuttons: 8 Direct Cue Trigger Pushbuttons Plus Mute
Knob: Rotary Encoder with Push to Select
Indicators: Channel Status LED's for Each Track, Power LED (16) Input Status LED's
Display: 16x2 character LCD Display
CF Socket: Front Access, Security Cover Plate

Physical

Power: Captive Barrel, 100 to 250 VAC, 50/60 Hz, 20 Watts Maximum
Class 2 Supply Provided
Size: 19" W x 1.75" H x 7" D (48.3 cm W x 4.5 cm H x 17.8 cm D)
Weight: 4 lbs. (1.8 Kg)
Environment: 0°C (32°F) to 38°C (100°F) 0-90% Relative Humidity
Compliance: CE, UL, CSA, WEEE, RoHS

**Alcorn
McBride
Inc.**

3300 S. Hiawasse Rd.
Building 105
Orlando, FL 32835
Tel (407) 296-5800
Fax (407) 296-5801
info@alcorn.com
www.alcorn.com