

BX-4KU

4K Uncompressed Video Playback Module
Model BX-4KU



AUDIO/VIDEO

The BX-4KU is an uncompressed video playback module for the BinloopX. Each module provides a single 4K/UHD output, or up to 4 independently-controllable 2K/HD outputs.

FEATURES:

- ▶ Purpose-Built Embedded Design
- ▶ Uncompressed DPX/TGA Video Playback
- ▶ Sources (1) 4K/UHD or (4) 2K/HD Channels
- ▶ Up to 120fps 4:4:4 10-bit Rec.2020
- ▶ 12G-SDI, 12G-SDI SFP, and DisplayPort
- ▶ U.2 High-Performance Solid State Media
- ▶ Integrated 1.3" Confidence Monitor
- ▶ Remote Content Update via Ethernet

APPLICATIONS:


- ▶ Dark Rides
- ▶ Parades
- ▶ Interactives
- ▶ Museum Exhibits
- ▶ Visitor Centers

The industry's favorite synchronized A/V player has been completely reengineered with our X-Series architecture to be the ultimate A/V platform for themed attractions. By leveraging the power of our industry-standard show control engine and the precision of our advanced SyncCore synchronization system, the BinloopX integrates perfectly with the Alcorn McBride ecosystem of products. This makes it the perfect solution to add high-quality A/V playback to any attraction.

Each BX-4KU video module provides either a single channel of 4K/UHD playback, or up to four channels of 2K/HD playback. This allows you to fill your displays with almost 9 million pixels of stunning uncompressed quality content at up to 120 frames-per-second. Professional-grade outputs like 12G-SDI Coax and 12G-SDI SFP allow for easy distribution without the need for extender devices. The removable internal SSD enables ultra-reliable low-latency playback of your Targa or DPX image sequences.


The modular design of the BinloopX makes it super-simple to scale up to meet the needs of your attraction. With multiple BX-4KU modules, a single BinloopX chassis can provide up to (2) channels of 8K, (8) channels of 4K/UHD, or (32) channels of 2K/HD.

Experience the ultimate in audio and video playback with Alcorn McBride reliability.

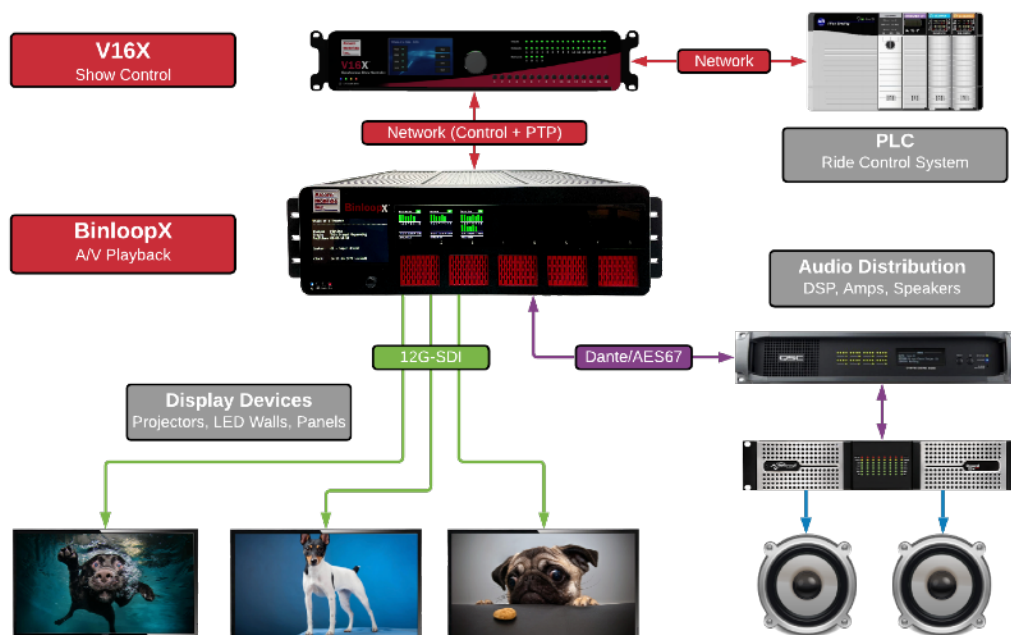

BX-4KU

4K Uncompressed Video Playback Module
Model BX-4KU

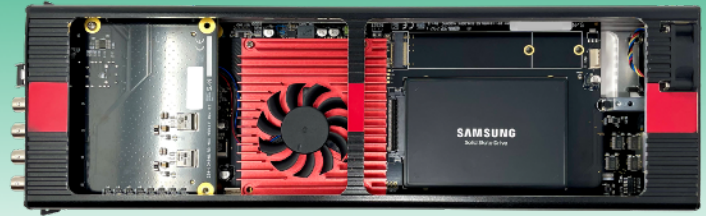

AUDIO/VIDEO

PRODUCT SPECIFICATIONS

Video

Resolutions	4096 x 2160 (4K) 4096 x 1080 (Supports 120fps) 3840 x 2160 (UHD - 2160p) 2048 x 1080 (2K) 1920 x 1080 (1080p) 1280 x 720 (720p)
Frame Rates	23.976, 24, 25, 29.97, 30, 47.952, 48, 59.94, 119.88, 120
Chroma Sampling	4:4:4 4:2:2
Color Depth	10-bit 8-bit
Video Outputs	Coax 12G-SDI, 6G-SDI, 3G-SDI (4 x BNC) SFP 12G-SDI (SFP Module) DisplayPort 1.4
Media Format	Targa (TGA) Digital Picture Exchange (DPX)
Media Network	10/100/1000 BASE-T (RJ45)
Media Storage	U.2 NVMe SSD (Up to 8TB)
Preview Monitor	Integrated 1.3" Monitor Playback Status and Timecode Output Preview

Synchronization

Clock Accuracy	<1 uS /w <1 ppB Free-run accuracy
Reaction Time	<1 Frame (When scheduled)

Physical

Power	Powered by BinloopX Chassis 16W Typ, 25W Max
Dimensions	1.6"W x 14.9"D x 5.1"H (40mm x 378mm x 130mm)
Weight	2 lbs (0.9 kg)
Environment	0°C (32°F) to 38°C (100°F) 0-90% Relative Humidity
Mounting	BinloopX A/V Module Slot
Compliance	UL, CE, CB, WEEE, RoHS

**Alcorn
McBride
Inc.**